Fact Sheet

XC II 800 Pro

BIZERBA

Modern PC technology in a compact design is what the X-Class II Pro series stands for. Benefit from an integrated 3-in-1 printer. This device allows convenient, intuitive and fast operation via touchscreen. Enjoy more performance due to a large RAM. All models are provided with a powerful Intel® Quad Core processor. Ideally suitable for new features or individual requirements.

More information
High performance with a wide range of solutions and options.

Specifications	Facts	Details
Color	Anthracite gray	RAL 7016
Operator display	10.1" touch TFT	Resolution: 1,024 x 600 (WSVGA)
		LED backlit
		Resistive 5-wire touch technology
		Infinitely inclinable: adjustable viewing angle
	15.6" touch TFT	Resolution: 1,366 x 768 (HD/WXGA)
		LED backlit
		Resistive 5-wire touch technology
		Infinitely inclinable: adjustable viewing angle
Customer display	No customer display	Self-service version
	7" TFT	Resolution: 800 x 480
		LED backlit
	10.1" TFT	Resolution: 1,024 x 600 (WSVGA)
		LED backlit
	15.6" TFT	Resolution: 1,366 x 768 (HD/WXGA)
		LED backlit
Stand (standard)	Height 516.5 mm	
Short stand (optional)	Height 395 mm	If used with cash register drawer
		15.6" displays are excluded
Operating system	Windows 10 IoT Enterprise 2016 LTSB	64 bit Windows
	BizLPOS3 OpenSuse® ≥ 42.1 Leap Kernel 4.2	64 bit Linux
Application software	RetailPowerScale	Bizerba scale software, compatible with Retail-Framework products
	RIK (RetailIntegratorsKit)	3rd-party software
Processor	Intel® Celeron® Processor N3160 Quad Core	Clock rate of up to 2.24 GHz
		L2 cache: 2 MB
		Instruction set: 64 bit
		Integrated graphics card: Intel® HD Graphics 400
Working memory	DDR3	4 GB RAM
Mass memory	SSD	60 GB, optionally 120 GB
Printer	3-in-1: Receipt, linerless or label	Optionally 2" or 3"
		up to 3"/76 mm paper width
		Clamshell design for easy paper role changing
		Print speed of up to 100 mm/s

External additional printer	Usage of the Bizerba power supply unit RSP 28 allows to use the following printers of the K-Flex series as external additional printer.	KF 3" receipt / linerless printer KF 3" label printer KF 2" L Compact receipt / linerless printer
Interfaces	2 x USB 3.0	Super speed
	2 x USB 2.0	High speed
	2 x COM	DSUB, RS232
	LAN	RJ45, GBit LAN
	Audio output	3.5 mm jack
	Cash register drawer connection (COM)	RJ12
Weighing ranges	3/6 kg	Interval 1/2 g, min. 20 g
	6/15 kg	Interval 2/5 g, min. 40 g
Temperature range	-10 °C to +40 °C	
Power consumption	In stand-by 2.4 W	Energy saving thanks to use of Wake on LAN
	During operation typically 20.3 W to 31.2 W	Depending on the version
Net weight of device	XC II 800 Pro 10.1"	Approx. 10 kg
	XC II 800 Pro 15.6"	Approx. 16 kg

Options

Options	Facts	Details
Software extensions	RetailApps	Extra software function per RetailApps
	Software modules: Cash register, scanning, e-cash, inventory, delivery note, proof of origin, time registration, video journal, RetailConnect	Extra software functions per module
Easy Level	Tilt compensation	Automatic correction of incorrect weight values due to angled position of the scale
WLAN modules	BWLC	Bizerba Wireless LAN Client 802.11 a/b/g max. 54 MBit/s
	USB	USB WLAN stick, no floating sales mode possible 802.11 a/b/g/n max. 300 MBit/s

Info graphics

Maßzeichnungen

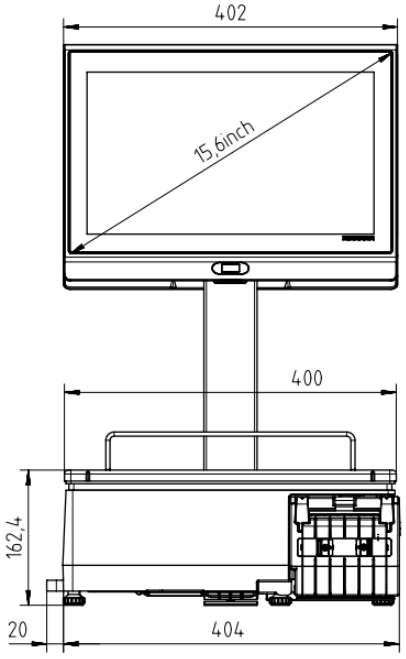

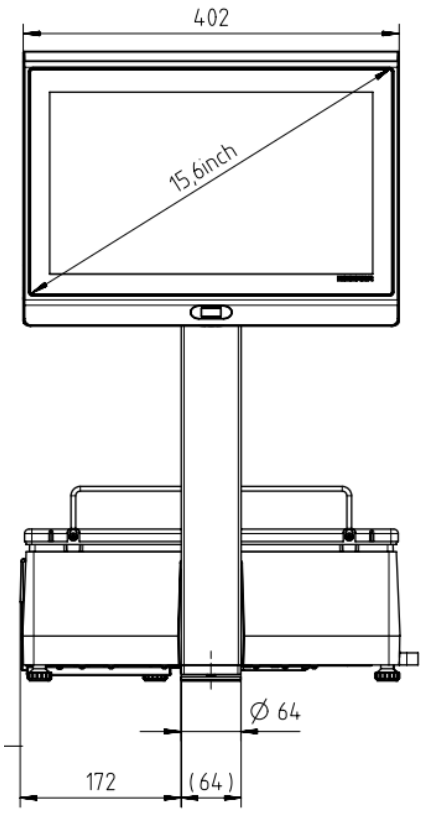

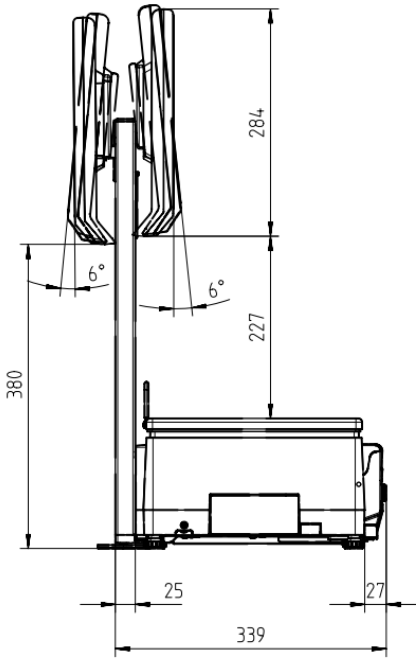

XC II 800 Pro 15,6" Operator display **XC II 800 Pro 15,6" Customer display** **XC II 800 Pro Side view**

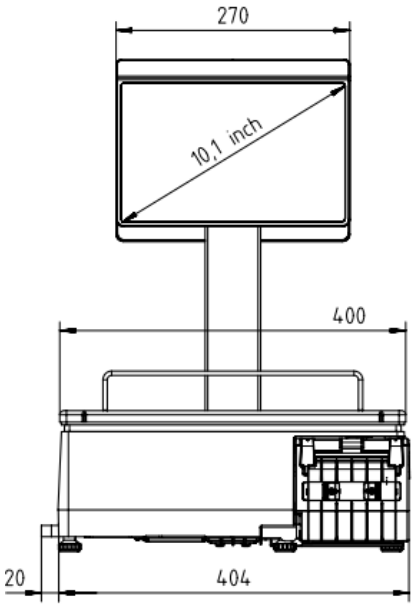

XC II 800 Pro 10,1" Operator display

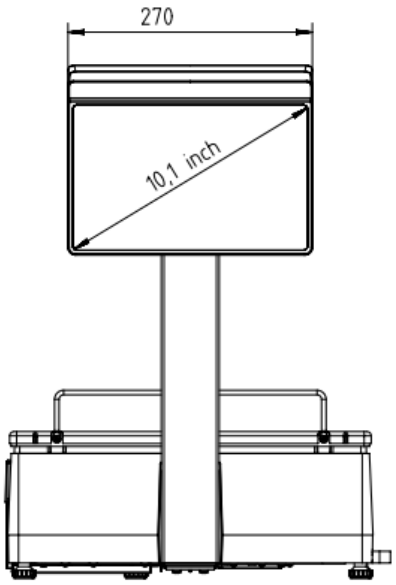

XC II 800 Pro 10,1" Customer display

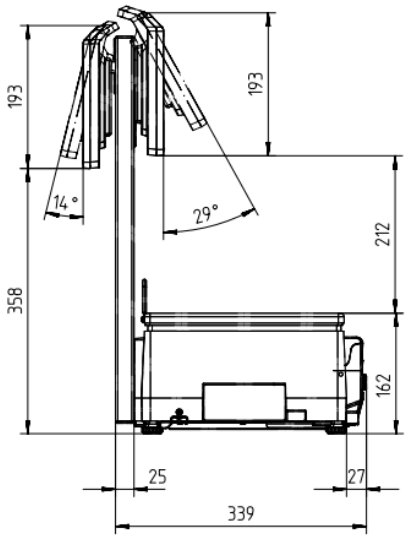

XC II 800 Pro Side view

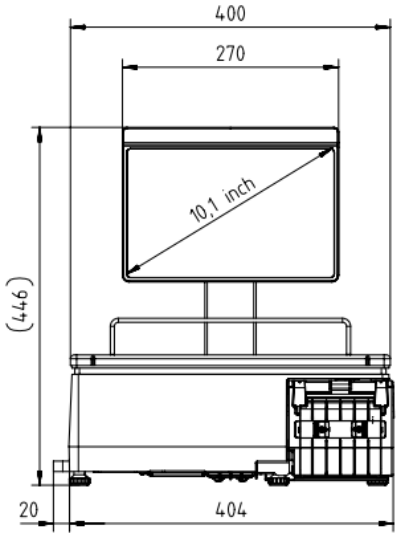

XC II 800 Pro 10,1" Operator display Shortpole

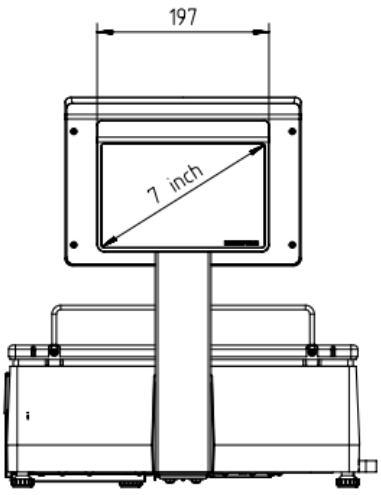

XC II 800 Pro 7" Customer display Shortpole

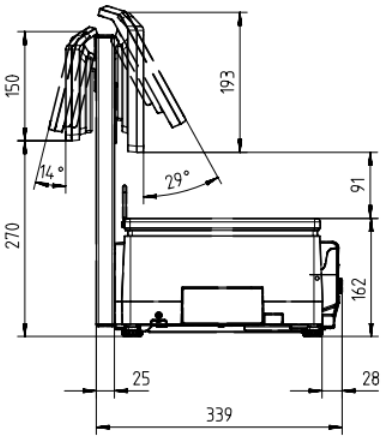

XC II 800 Pro Side view Shortpole

Bizerba SE & Co. KG
Wilhelm-Kraut-Straße 65
72336 Balingen

T +49 7433 12-0
fax: +49 7433 12-2696
marketing@bizerba.com

www.bizerba.com